


1/13




2/13

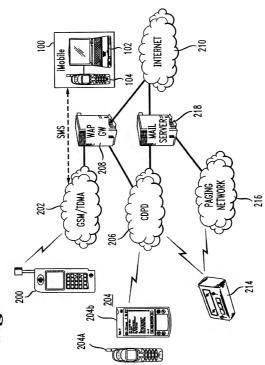







3/13









4/13















# Fig. 10A

mfchen4iproxy - Instant Messag		- 61 X							
<u>File Edit View People</u>	dit <u>V</u> iew <u>P</u> eople mfchen4iproxy WARNING LEVEL 0%								
mingfengchen: echo hello world! mfchen4iproxy: Ming-feng Chen [aim:mingfengchen]: hello world! mfchen4iproxy: flight 001 mfchen4iproxy: flight 001 on 12-Oct From LAS [0915/120CT] Gate:D9 to LAX [1027/120CT] Gate:24 From LAX [1315/120CT] Gate:27 to NRT [1655/130CT] Gate: NONE From NRT [1915/130CT] Gate:NONE to BKK [2350/130CT] Gate: NONE									
A A A B I U Ink									
Warn BLOCK	Add <u>B</u> uddy	ျို Inf <u>o</u>	<u>S</u> end						


#### Fig. 10B

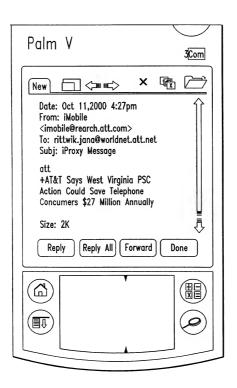


# Fig. 11A

iproxy4.att - Instant MessageDX									
File Edit View People mfchen4iproxy WARNING LEVEL 0%									
YigFarn jdbe connect spdb iproxy4att 200 sunjdbc.odbc.odbc.JdbcOdbcConnection@48cc8c YihFarn jdbc select APPL_NAME from SPDB_APPL where APPL_ID="APS" iproxy4att 200 OK APPL_NAME ACCUNET PACKET SERVICE/INFORMATION ACCESS SERVICE (APS/IAS) APS YihFarn jdbc select WORK_TELEPHONE_NUMBER from SPDB_APPL_CONTANT where APPL_ID="APS" iproxy4att 200 OK WORK_TELEPHONE_NUMBER 9082347373 7033718853									
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$									

### Fig. 11B

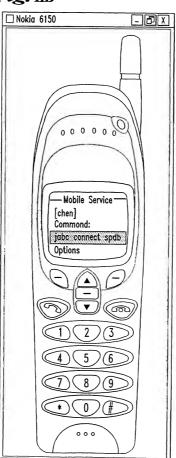

					_					_	 		_	
mfchen4i	proxy –	Inst	ant	Mes	sa	ge								百X
<u>File Edit View People</u>														
mingfengchen: corba exec PhoneDivert:getDivert herman herpass mfchen4iproxy: ServerName=PhoneServant of herman DriveNumber=4 Divt1:no=1,ring=3,phon=+886229505401,desc=Office Phone Divt2:no=2,ring=6,phon=+886936105401,desc=Mobile Phone Divt3:no=3,ring=5,phon=+889228734065,desc=Home Divt4:no=4,ring=2,phon=+889229508655,desc=Audix														
A A A B I U Ink														
		_					_	_			 			
∰ <u>W</u> arn	<u>B</u> LOCK						Ac	<u>}</u>	3ud	ldy	I	1 nf <u>o</u>	٤	
[c:\iproxy\corba]\jdk1.3\bin\java PhoneServer Init ORB Resolve NameService PhoneServer ready ::getDivert < herman, xxx >														
[c:\jdk1.3\bin]tnameserv.exe Initial Naming Context: I OR:0000000000000284944c3a6f6d672e6f72672f436f734e61d69 6e746578743a312e3000000000010000000000005400010100000000e 2e35320000f4000000018afabcfe00000000029d66b751000000000000 00010000014000000000100200000000010100000000														



mfch	en4iproxy -	Instant Messag	e		- 6 X			
<u>F</u> ile	<u>E</u> dit <u>V</u> iew <u>P</u>	eople	mfchen4iproxy's	s WARNING LEV	VEL 0%			
mingfengchen: inbox mail:imobile@reasearch.att.com status mfchen4iproxy: Tool: 37 Unread: 1 New: 1 Mark Time: nome mingfengchen: inbox mail:imobile@research.att.com list mfchen4iproxy: Mark Time: none 37.728B From: mfchen@icetech.com.tw Subject: [iproxy] meeting time. mingfenchen: inbox mail:imobile@research.att.com read 37 mfchen4iproxy: Dear all: The meeting time is changed to this afternoon.								
	A A A B I U Ink							
₩ W	√ © BLOCK		Add Buddy	j <u>l</u> Info	≡∑ Send			

